

## ZHS-0308 IRCUT

ISO/TS16949 ISO9000 ISO14000  
RoHS REACH CE UL VDE TÜV




总重量 Total Weight: 7g  
应用范围: CMOS和CCD摄像机  
APPLICATION: The Door IP Intercom

### 综合特性

#### GENERAL FEATURES


1. 驱动类型: 励磁式  
Motor Type: Magnet moving
2. 工作电压: DC 3.3-6V  
Work Voltage : DC 3.3-6V
3. 工作环境温度:  
温度: -30~80℃  
湿度: 0~90%  
Operating environment:  
Temp: -30~80℃  
Relative humidity: 0~90%
4. 滤光片切换响应时间: 50ms  
Fluid medium: Air, volati
5. 寿命: 典型值为10万次 (on 0.1s, off 3s)  
Lify cycle: 1,000, 00 cycles (on 0.1s, off 3s)
6. 绝缘等级: B类  
Insulation class: class B
7. 安装CCD和CMOS芯片的窗口高度 0.8和孔距20, 也可按客户要求定做。

类型: 抽屜式

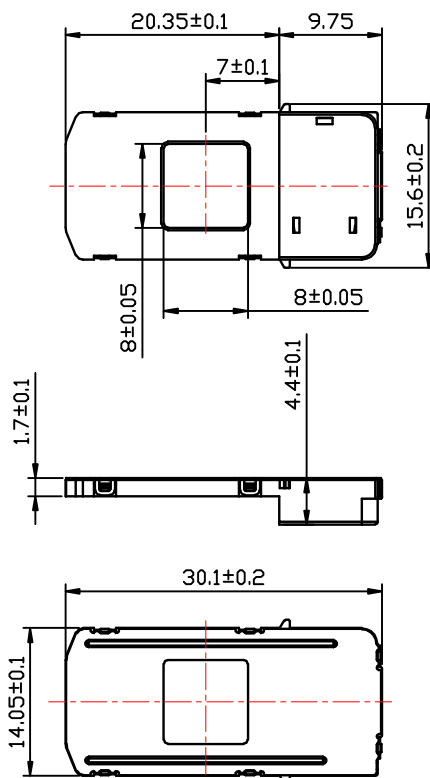


单位:mm Units:mm

轴测图




固定座结构



### 镜片光谱图

1. IR Filter spectrum :

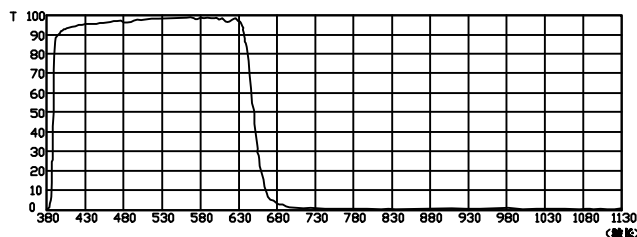

2. AR Filter spectrum :

