


## ZHI-1711 Electromagnet

ISO/TS16949 ISO9000 ISO14000  
RoHS REACH CE UL VDE TÜV



类型: 断电吸合 TYPE: DEENERGIZED SUCKER

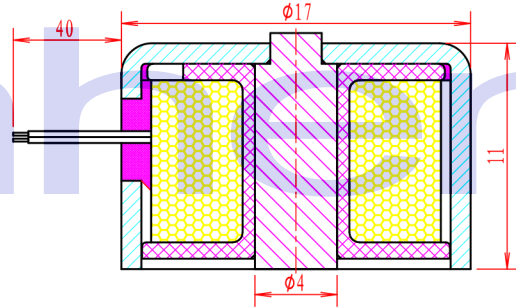

总重量 Total Weight: 15g  
应用范围: 用玩具等  
APPLICATION: Textile machine etc

型号 Type no.

ZHI-1711E-XX A XX

E 通电吸 Electromagnet  
P 永磁吸 Permanent magnet

电压 Voltage (V)

系列号 Serial No.: A, B, C, ...

电阻 Resistance ( $\Omega$ )

PERFORMANCE PROMETER 性能参数

单位: mm Units: mm


工作周期 (%) = $\frac{\text{工作时间}}{\text{工作时间} + \text{断开时间}} \times 100\%$ Duty cycle (%) = $\frac{\text{"ON" time}}{\text{"ON" time} + \text{"OFF" time}} \times 100\%$	连续 Continuous 100%	间断 Or less 50%	间断 Or less 25%	间断 Or less 10%
最大工作时间(秒) MAX. "on" time in seconds	$\infty$	30	10	1
瓦特(W) (20°C) Watts at 20°C	1.6	2.4	4.8	6
保持力 holding force (gf)	500	700	850	1000

## ZHI-1727 Electromagnet

ISO/TS16949 ISO9000 ISO14000  
RoHS REACH CE UL VDE TÜV



类型: 通电吸合 TYPE: ENERGIZED SUCKER

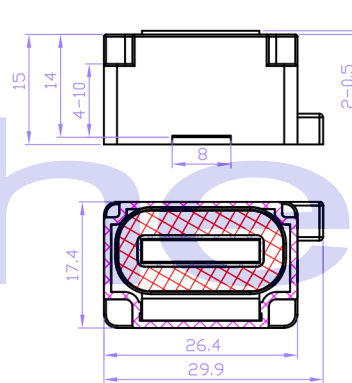

总重量 Total Weight: 40g  
应用范围: 用于吸尘器  
APPLICATION:

型号 Type no.

ZHI-1727E-XX A XX

E 通电吸 Electromagnet  
P 永磁吸 Permanent magnet

电压 Voltage (V)

系列号 Serial No.: A, B, C, ...

电阻 Resistance ( $\Omega$ )

PERFORMANCE PROMETER 性能参数

单位: mm Units: mm

工作周期 (%) = $\frac{\text{工作时间}}{\text{工作时间} + \text{断开时间}} \times 100\%$ Duty cycle (%) = $\frac{\text{"ON" time}}{\text{"ON" time} + \text{"OFF" time}} \times 100\%$	连续 Continuous 100%	间断 Or less 50%	间断 Or less 25%	间断 Or less 10%
最大工作时间(秒) MAX. "on" time in seconds	$\infty$	55	19	3
瓦特(W) (20°C) Watts at 20°C	0.8	1.2	2.4	6
保持力 holding force (gf)	3200	3600	4000	4500